




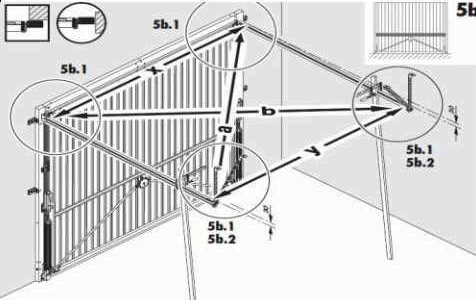


| | | | |
|--|---|---|---|
| Hormann Romania srl str. Complexului nr 15 com Chiajna, Ilfov | Fisa tehnica Usa basculanta GSL | Dedeman |  |
| Caracteristici produs | | | |
| Producator | Hörmann, Germania | | |
| Denumire | Usa basculanta Light | | |
| Foaie usa | Foaie tabla otel, suprafata coaja de porocala | | |
| Culoare RAL | RAL 8028 (Maro); RAL 9016 (Alb); | | |
| Elemente siguranta |  | Capace protectie flexibila (amplasate deasupra bratelor de parghie) | |
| |  | Sistem de arc multiplu , asigura usa impotriva caderii. Distantele dintre spirele arcurilor este atat de mica , incat nici macar degetele copiilor nu se pot prinde in ele. | |
| |  | Protectie anti-efractie. Sistemul unic de blocare cu piedica al usilor basculante Hormann fixeaza colturile blatului usii strans pe rama. | |
| |  | Sina de culisare profilata unic | |
| Standard de siguranta | EN 13241-1 | | |
| Mod de operare standard | Maner plastic PVC | | |
|  | | | |
| <p>Modalitate montaj:</p> <p>Montaj in gol: + 105mm latime; + 70 mm inaltime ex. dim.com: 2500x2125mm ex.dim.necesare montaj in gol: 2605mmx2195mm.</p> <p>Montaj in spatele golului:dim. de comanda = dim. necesara montaj in spatele golului (diferente permise pentru montajul in spatele golului: max. - 30 mm/ max. 90 mm latime; max. - 30 mm/ max. 30 mm inaltime;</p> | | | |