




SALI®

4" monoblock submerged pump

CHARACTERISTIC CURVES AND PERFORMANCE DATA 50 Hz n= 2900 1/min

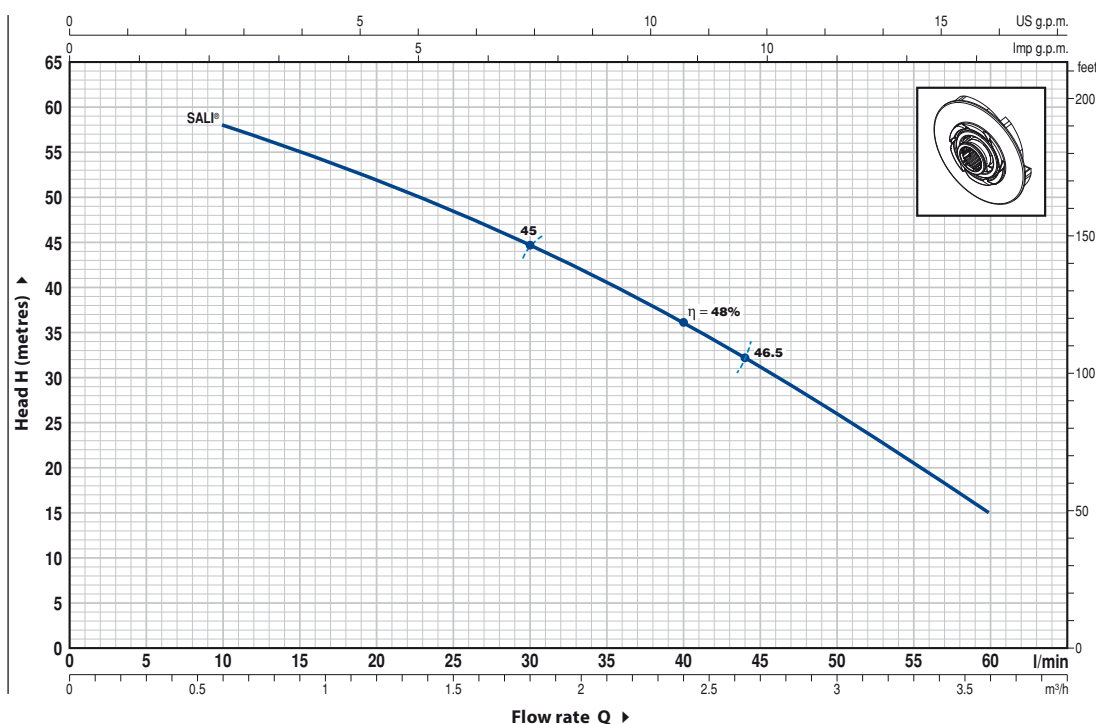


MODEL	POWER		Q	0	0.6	1.2	1.8	2.4	3.0	3.6
Monofase	kW	HP	m³/h	0	0.6	1.2	1.8	2.4	3.0	3.6
			l/min	0	10	20	30	40	50	60
SALI®	0.75	1	H metres	61	58	52	44.5	36	26	15

Q = Flow rate H = Total manometric head

Tolerance of characteristic curves in compliance with EN ISO 9906 Grade 3.

DIMENSIONS AND WEIGHT

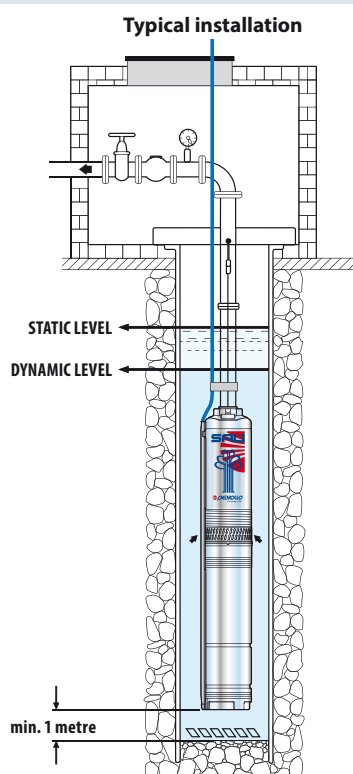

MODEL	PORT	DIMENSIONS mm			kg
Single-phase	DN	N° STAGES	Ø	h	1~
SALI®	1"	8	100	586	11






SALI®

4" monoblock submerged pump

INNOVATIONS

- **New hydraulic** with floating impellers
- **Reduced the decay of the hydraulic performance** due to the particular shape of the impellers
- Patented anti-sand system which allows the use with maximum **sand content of 150 g/m³**.

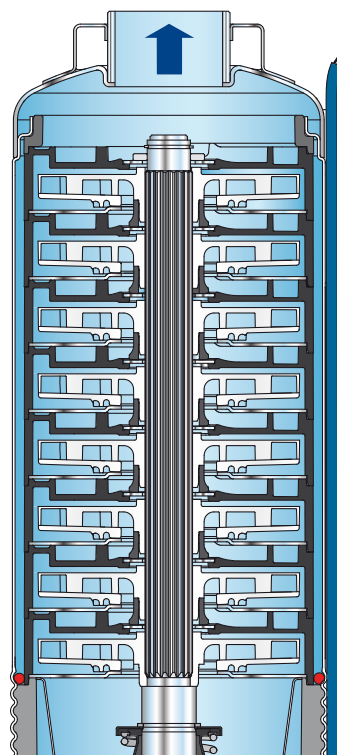

PACKAGING

