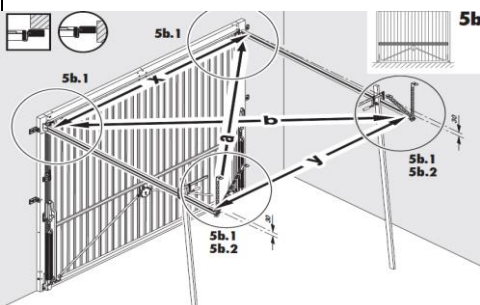


Hormann Romania srl str. Complexului nr 15 com Chiajna, Ilfov	Fisa tehnica Usa basculanta GSL	Dedeman	
23.10.2015		Caracteristici produs	
Producator	Hörmann, Germania		
Denumire	Usa basculanta Light		
Foaie usa	Foaie tabla otel, suprafata coaja de porocala		
Culoare RAL	RAL 8028 (Maro); RAL 9016 (Alb);		
Elemente siguranta		Capace protectie flexibile (amplasate deasupra bratelor de parghie)	
		Sistem de arc multiplu , asigura usa impotriva caderii. Distanțele dintre spirele arcurilor este atat de mica , incat nici macar degetele copiilor nu se pot prinde in ele.	
		Protectie anti-efractie. Sistemul unic de blocare cu piedica al usilor basculante Hormann fixeaza colturile blatului usii strans pe rama.	
		Sina de culisare profilata unic	
Standard de siguranta	EN 13241-1		
Mod de operare standard	Maner plastic PVC		
			
Modalitate montaj: Montaj in gol: + 105mm latime; + 70 mm inaltime ex. dim.com: 2500x2125mm ex.dim.necesare montaj in gol: 2605mmx2195mm. Montaj in spatele golului: dim. de comanda = dim. necesara montaj in spatele golului (diferente permise pentru montajul in spatele golului: max. - 30 mm/ max. 90 mm latime; max. - 30 mm/ max. 30 mm inaltime;			
Izolatie (optional)	Usa poate fi izolata, in regim propriu. min. 6 kg/ m ² ; max. 10 kg/m ² grosime izolatie: max 16mm.		
Dotare optionala			
Actionare electrica Liftronic 500		Forta max. 500N, viteza max. cca. 10,5 cm/s; Tensiunea de operare 230/240 V AC; Include 2 telecomenzi RCS 2, 433 Mhz; Suprafata maxima : 7 m ² ; Latime maxima : 3000mm; Inaltime max : 2750mm usa basculanta; 2250 mm usa sectionala Adancime 3260mm	
Accesorii optionale:	cablul de urgenta (este necesar cand garajul nu are o intrare secundara)		
		telecomanda suplimentara RCS 2, frecventa 433 MHZ	
		telecomanda suplimentara tip bricheta (pentru automobil)	
		buton de interior	
		tastatura cod radio	
		selector cu cheie	
		bariera luminoasa (fotocelule)	
durata medie de exploatare	10 ani - usa basculanta; 3 ani actionare electrica		
perioada de garantie	2 ani - usa basculanta; actionare electrica		